



TECHNICAL DATA / FEATURES

- dimensions: $\phi 117 \times 74$
- luminous flux of the LED module: 3000 lm, 2500 lm, 2000 lm, 1500 lm
- luminous flux of the lamp: 2400 lm, 2000 lm, 1600 lm, 1200 lm
- maximum power: 30W, 29W, 25W, 24W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 6 x LED
- colour temperature: 5000-7000K
- light distribution angle: 4°
- IP rating: IP67, IP69K, IP66
- work temperature: -40°C - +80°C
- housing's material: aluminium/plastic
- lens' material: plastic
- built-in connectors: Deutsch DT, AMP Faston 250, AMP SuperSeal 1.5
- other: protection:
 - against overheating
 - against reverse polarisation



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence. Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).



Equipped with removable protective grille. The bracket parts are made of Inox steel.

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

- deutsch plug DT06-2S 2-pin - cat. No. A.07135
- AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
- AMP Faston 250 plug 2-pin - cat. No. A.07138

DIMENSIONS

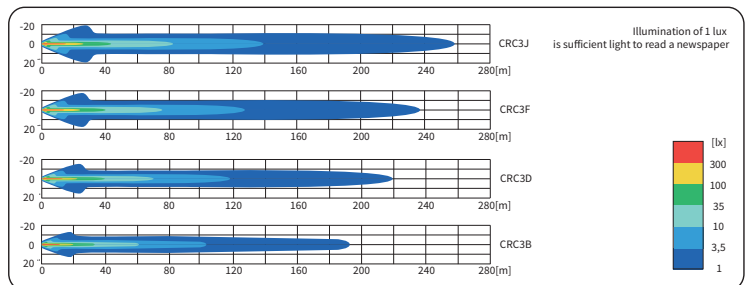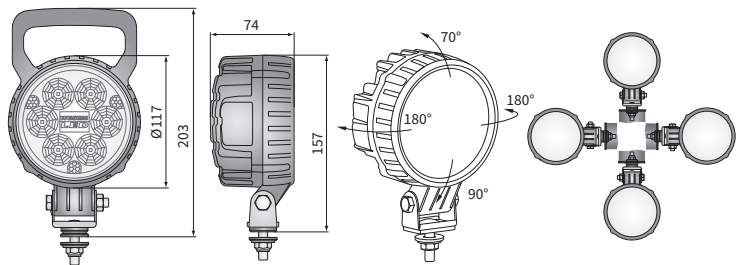

Cat. number	Luminous flux				IP rating	Accessories	LED module 12V-24V				Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1.5	Cap / Pin
	3000 lm	2500 lm	2000 lm	1500 lm			handle	cable 0.5 m	cable 8 m	switch					
CRC3J.57000	✓					✓	✓	✓	✓						
CRC3J.57007	✓					✓	✓	✓	✓			✓		2	
CRC3F.50400		✓				✓	✓	✓	✓						
CRC3F.50480		✓				✓	✓	✓	✓						
CRC3F.50406		✓			✓	✓	✓	✓	✓	✓			2		
CRC3F.50407		✓				✓	✓	✓	✓			✓		2	
CRC3F.50408		✓				✓	✓	✓	✓				✓	2	
CRC3F.50410		✓				✓	✓	✓	✓						
CRC3F.50481		✓				✓	✓	✓	✓						
CRC3F.50494		✓				✓	✓	✓	✓						
CRC3F.50416		✓			✓	✓	✓	✓	✓	✓			2		
CRC3F.50417		✓				✓	✓	✓	✓			✓		2	
CRC3F.50418		✓				✓	✓	✓	✓				✓	2	
CRC3D.50200			✓			✓	✓	✓	✓						
CRC3D.50280			✓			✓	✓	✓	✓						
CRC3D.50206			✓		✓	✓	✓	✓	✓	✓			2		

Cat. number	Luminous flux				IP rating	Accessories	LED module 12V-24V				Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1.5	Cap / Pin
	3000 lm	2500 lm	2000 lm	1500 lm			handle	cable 0.5 m	cable 8 m	switch					
CRC3D.50207				✓		✓	✓	✓	✓					2	
CRC3D.50208				✓		✓	✓	✓	✓					2	
CRC3D.50210				✓		✓	✓	✓	✓						
CRC3D.50281				✓		✓	✓	✓	✓						
CRC3D.50216				✓		✓	✓	✓	✓	✓			2		
CRC3D.50217				✓		✓	✓	✓	✓			✓		2	
CRC3D.50218				✓		✓	✓	✓	✓				✓	2	
CRC3B.49200				✓		✓	✓	✓	✓						
CRC3B.49280				✓		✓	✓	✓	✓						
CRC3B.49206				✓		✓	✓	✓	✓	✓			2		
CRC3B.49207				✓		✓	✓	✓	✓			✓		2	
CRC3B.49208				✓		✓	✓	✓	✓				✓	2	
CRC3B.49210				✓		✓	✓	✓	✓				✓	2	
CRC3B.49281				✓		✓	✓	✓	✓						
CRC3B.49216				✓		✓	✓	✓	✓	✓			2		
CRC3B.49217				✓		✓	✓	✓	✓			✓		2	
CRC3B.49218				✓		✓	✓	✓	✓				✓	2	