

light functions:	passing	position	driving	daytime
function markings:	HCR	A	HCR	RL
traffic:	right-hand			
reference mark:	-		17,5	-
maximum power:	13W	1,4W	13W	5,5W
rated voltage:	12÷24V DC			
permissible voltage:	10,5÷30V DC			
current at 13,2V:	1,1A	0,01A	1,1A	0,4A
current at 28V:	0,5A	0,01A	0,5A	0,3A
maximum current:	1,3A	0,01A	1,3A	0,6A
IP rating:	IP67, IP69K			
work temperature:	-40°C ÷ 80°C			
housing's material:	aluminium			
lens' material:	glass			
corrosion resistance:	ISO 9227, 500h			
vibration resistance:	15,3G 24÷2000Hz			
EMC Class CISPR 25:	III			
other:	protection: - against overheating - against reverse polarisation			





R10 homologation concerns electromagnetic compatibility. They do not emit electromagnetic interference as well as they are resistant to it's influence. Correct polarity required.

Turning on the side lights automatically deactivates the daytime running lights (DRL). The high beam headlights turn on together with the low beam headlights (HCR approval), which improves the illumination of the space in front of the vehicle.

Dedicated application:

- A - Chevrolet Camaro (70-81)
- Ford Mustang (73-81)
- Jaguar XJ (68-92)
- Jeep Wrangler: TJ (97-06), CJ7 (76-86), JK (07-17)
- Land Rover Defender (from 1983)
- Lada: Niva 2121, Niva 2131
- Mazda MX-5 (89-98)
- Suzuki Samurai SJ (81-98)
- B - Mercedes G class
- W460, W461 (1979-1990),
- W463 (1990-2005)
- VW Golf I (1974-2009)
- C - Nissan Patrol Y60 (1987-1997)

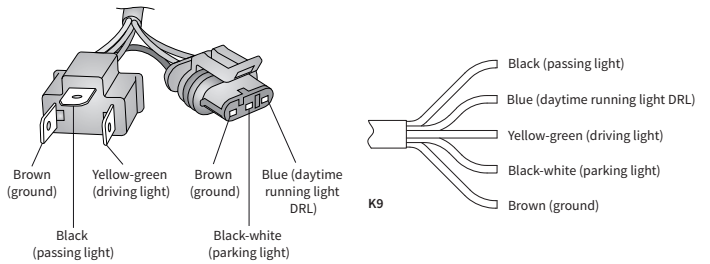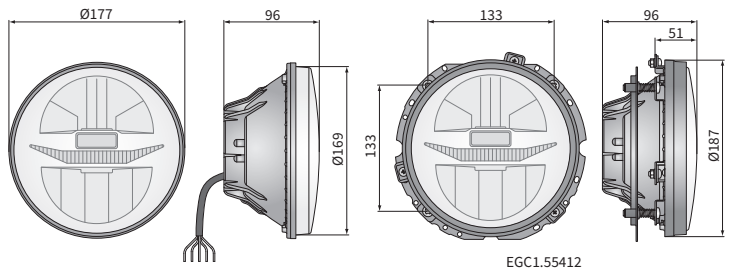

Cat. number	Homologation code	Light functions				Color of the grille	black	metallic	Side	right	left	Accessories	cable 0,25 m	H4 connector	SuperSeal 3S Plug	SuperSeal 3P Cap	mounting plate	Application	dedicated	Packaging / pc	carton box
		passing	position	driving	daytime																
EGC1.55400	106	✓	✓	✓	✓	✓			✓	✓		✓						A	1	1	
EGC1.55450	106	✓	✓	✓	✓	✓	✓		✓	✓		✓						A	1	1	
EGC1.55402	106	✓	✓	✓	✓	✓			✓	✓		✓	✓	✓	✓	✓	✓	A/C	1	1	
EGC1.55452	106	✓	✓	✓	✓	✓	✓		✓	✓		✓	✓	✓	✓	✓	✓	A/C	1	1	
EGC1.55412	106	✓	✓	✓	✓	✓			✓	✓		✓	✓	✓	✓	✓	✓	B	1	1	
AR.54337									✓	✓							✓	B	1	1	

