



## TECHNICAL DATA / FEATURES

- dimensions: 176x87x86
- luminous flux of the LED module: 5500 lm, 4000 lm, 3000 lm, 2200 lm
- luminous flux of the lamp: 4400 lm, 3200 lm, 2400 lm, 1800 lm
- maximum power: 70W, 40W, 35W, 28W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 10 x LED
- colour temperature: 5700-7000K
- light distribution angle: 60°
- IP rating: IP67, IP69K, IP66
- work temperature: -40°C - +80°C
- housing's material: aluminium
- lens' material: plastic
- built-in connectors: Deutsch DT, AMP Faston 250, AMP SuperSeal 1.5
- other: protection:
  - against overheating
  - against reverse polarisation



## ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in an upright or upside down position.

The bracket parts are made of Inox steel.

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

- Deutsch plug DT06-2S 2-pin - cat. No. A.07135
- AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
- AMP Faston 250 plug 2-pin - cat. No. A.07138



Replacement parts:

- brackets - cat. No. CAR1.47300

Equivalents for Hella:

- CRV1A.49514 - 1GB 996 386-001
- CRV1A.49502 - 1GB 996 386-031

## DIMENSIONS

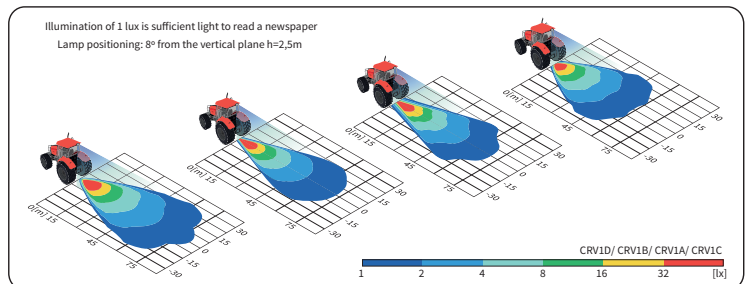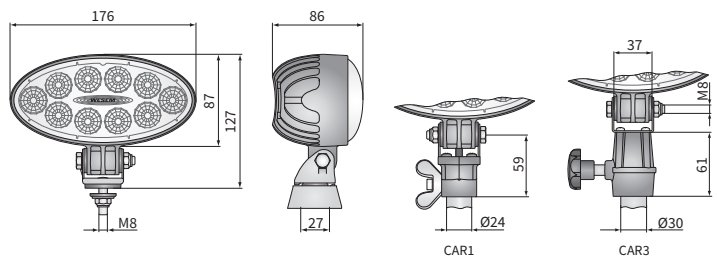

Cat. number	Luminous flux				IP rating	Accessories	Bracket	Connectors	Cat. number	Luminous flux				IP rating	Accessories	Bracket	Connectors
	5500 lm	4000 lm	3000 lm	2200 lm						5500 lm	4000 lm	3000 lm	2200 lm				
CRV1D.55901	✓	✓	✓	✓	IP66		✓		CRV1A.49502	✓	✓	✓	✓	IP66		✓	
CRV1D.55914	✓	✓	✓	✓	IP67		✓	✓	<b>CRV1A.49513</b>	✓	✓	✓	✓	IP67		✓	✓
CRV1D.55902	✓	✓	✓	✓	IP69K		✓		<b>CRV1A.49521</b>	✓	✓	✓	✓	IP69K		✓	✓
CRV1D.55903	✓	✓	✓	✓		cable 0,15 m	✓		CRV1A.49526	✓	✓	✓	✓		cable 0,15 m	✓	✓
CRV1D.55921	✓	✓	✓	✓		cable 0,5 m	✓	✓	CRV1A.49522	✓	✓	✓	✓		cable 0,5 m	✓	✓
CRV1D.55934	✓	✓	✓	✓		cable 8 m	✓	✓	CRV1A.49534	✓	✓	✓	✓		cable 8 m	✓	✓
<b>CRV1B.52301</b>	✓	✓	✓	✓		switch	✓		CRV1A.49533	✓	✓	✓	✓		switch	✓	✓
CRV1B.52306	✓	✓	✓	✓			✓	✓	CRV1A.49542	✓	✓	✓	✓			✓	✓
<b>CRV1B.52304</b>	✓	✓	✓	✓			✓	✓	CRV1A.49540	✓	✓	✓	✓			✓	✓
CRV1B.52302	✓	✓	✓	✓			✓	✓	CRV1C.52701	✓	✓	✓	✓			✓	✓
<b>CRV1B.52303</b>	✓	✓	✓	✓			✓	✓	CRV1C.52706	✓	✓	✓	✓			✓	✓
CRV1B.52313	✓	✓	✓	✓			✓	✓	CRV1C.52714	✓	✓	✓	✓			✓	✓
CRV1B.52312	✓	✓	✓	✓			✓	✓	CRV1C.52702	✓	✓	✓	✓			✓	✓
CRV1B.52340	✓	✓	✓	✓			✓	✓	CRV1C.52713	✓	✓	✓	✓			✓	✓
<b>CRV1A.49501</b>	✓	✓	✓	✓			✓	✓	CRV1C.52721	✓	✓	✓	✓			✓	✓
CRV1A.49541	✓	✓	✓	✓			✓	✓	CRV1C.52726	✓	✓	✓	✓			✓	✓
<b>CRV1A.49506</b>	✓	✓	✓	✓			✓	✓	CRV1C.52734	✓	✓	✓	✓			✓	✓
<b>CRV1A.49514</b>	✓	✓	✓	✓			✓	✓	CRV1C.52733	✓	✓	✓	✓			✓	✓