



TECHNICAL DATA / FEATURES

- dimensions: 133x107x112, Ø117x74, 100x100x76
- maximum power: 40W, 32W, 20W
- nominal voltage: 12V-24V DC, 12V-48V DC
- permissible power supply voltage: 10.5V-30V DC, 10.5V-60V DC
- source of light: 12 x LED, 6 x LED
- colour of light: dark blue
- light distribution angle: 4°, 6°
- IP rating: IP67, IP69K
- work temperature: -40°C - +80°C
- housing's material: aluminium, aluminium/plastic
- lens' material: glass, plastic
- built-in connectors: Deutsch DT, AMP SuperSeal 1.5
- other: protection:
 - against overheating
 - against reverse polarisation



ADDITIONAL INFORMATION

Especially recommended for sprayers used in agriculture. They provide control of spraying at dusk and at night by observing the operation of individual nozzles. The blue color of the light helps to better observe the sprayed liquid stream.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).


It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137

Deutsch plug DT06-2S 2-pin - cat. No. A.07135

DIMENSIONS

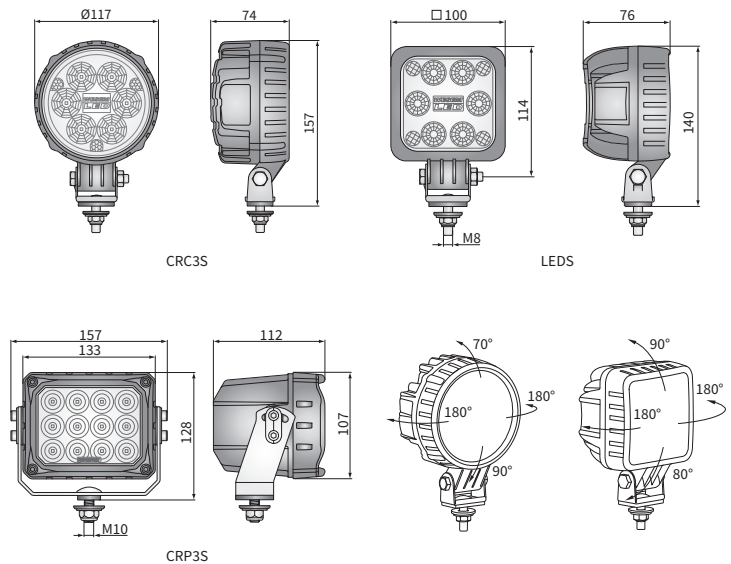

Cat. number	Shape			The light colour		Beam angle		Rated power			Lens material		IP rating	Accessories	Connectors		Packaging / pc	carton box
	rectangular	round	square	dark blue	red	4°	6°	40W	32W	20W	glass	plastic			Deutsch DT	AMP SuperSeal 1.5		
CRP3S.60708	✓			✓		✓		✓			✓	✓	✓	✓	✓		2	1
CRC3S.54507		✓		✓		✓			✓			✓	✓	✓	✓	✓	2	1
CRC3S.54510		✓		✓		✓			✓			✓	✓	✓	✓	✓	2	1
CRC3S.54508		✓		✓		✓			✓			✓	✓	✓	✓	✓	2	1
CRC3S.54509		✓		✓		✓			✓			✓	✓	✓	✓	✓	2	2
LEDS.58900			✓	✓			✓			✓		✓	✓	✓	✓	✓		1
LEDS.58907			✓	✓								✓	✓	✓	✓	✓	2	1
LEDS.58908			✓	✓								✓	✓	✓	✓	✓	2	1