



TECHNICAL DATA / FEATURES

- dimensions: 100x100x76
- luminous flux of the LED module: 3000 lm, 2500 lm, 1500 lm
- luminous flux of the lamp: 2400 lm, 2000 lm, 1200 lm
- maximum power: 30W, 29W, 19W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 6 x LED
- colour temperature: 5000-7000K
- light distribution angle: 50°, 66° x 22°, 6°
- IP rating: IP67, IP69K
- work temperature: -40°C - +80°C
- housing's material: aluminium/plastic
- lens' material: plastic
- built-in connectors: -
- protection:
 - other:
 - against overheating
 - against reverse polarisation





ADDITIONAL INFORMATION

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.
Correct polarity required.

A - tractors Valtra series:

M120, M120E, M130, M150, N101, N103 HiTech, N111, N111e, N113 HiTech 5, N121, N122 Direct, N122 Versu, N123 Direct, N123 HiTech 5, N123 Versu, N141, N142 Direct, N142, Versu, N143 Direct, N143 HiTech, N143 Versu, N163 Direct, N163 Versu, N82 HiTech, N91, N92, N93 HiTech, N93 HiTech5, T120, T121C, T130, T131C, T131H, T132 Direct, T132 Versu, T133 Hitech, T140E, T140ECH, T150, T150CH, T151EH, T152 Direct, T152 Versu, T153 Direct, T153 Hitech, T153 Versu, T160, T160CH, T161H, T162 Direct, T162 Versu, T163E Direct, T163E Versu, T170, T171H, T172 Direct, T172 Versu, T173 Hitech, T180, T182 Direct, T182 Versu, T183 Direct, T183 Versu, T190, T191H, T193 Hitech, T202 Direct, T202 Versu, T203 Direct, T213 Versu, X100, X110, X120, XM130, XM150.

DIMENSIONS

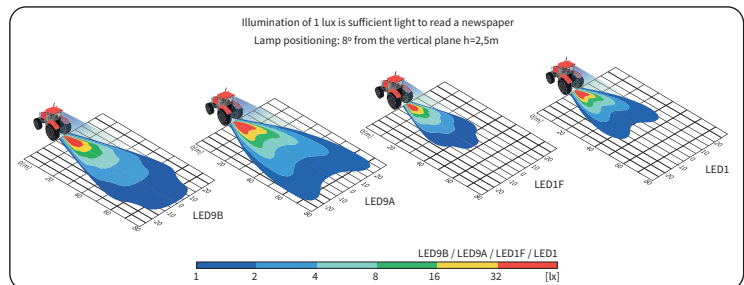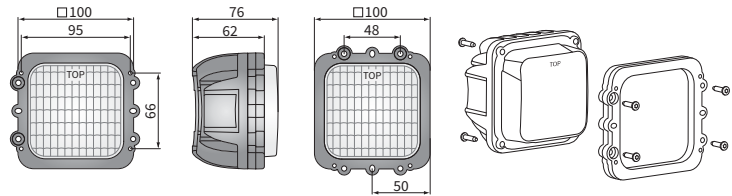

Cat. number	Valtra Catal. No.	Luminous flux			Optics	FF	lenticular	Beam angle	Accessories			Connectors	Deutsch DT	Application	dedicated
		3000 lm	2500 lm	1500 lm					LED module 12V-24V	cable 0,35 m	cable 0,5 m				
LED9B.53839	V39077400, V36520700	✓				✓		50°		✓	✓	✓	✓		A
LED9A.53739	V39077400, V36520700	✓						66° x 22°		✓	✓	✓	✓		A
LED8F.51088			✓			✓					✓	✓	✓		
LED1F.47439	V39077400, V36520700			✓		✓		6°		✓	✓	✓	✓		A
LED1.46899	V39077400, V36520700			✓						✓	✓	✓	✓		A